



# ARF-95 Series Animal Transport Unit

Six (6) Animal Compartments and One (1) Storage Compartment



## Standard Construction

- Full 100% fiberglass-reinforced plastic construction throughout.
- Tubular 11 gauge steel cross members – molded into bottom of unit.
- Sides skirted to center line of rear wheels with fluted trim.
- Each compartment constructed separately, to prohibit contact with animals in adjoining compartments.
- Compartments finished smooth with rounded corners to facilitate cleaning. No sharp edges or cracks to collect dirt.
- Drain pan in front of each compartment, with drain hole.
- Compartment opening flush all around. No door frame or roof rail protrusions to hinder removal of animals or cleanout.
- Compartment doors molded with five (5) extra large louvers on outside panel.
- Heavy Duty wire grille safety doors installed inside regular doors. Protects against escape of animal when outer door is opened. Swings out to provide full use of depth of compartment.
- Stainless steel door hinges and latches equipped with cylinder locks, all keyed alike. Large 6" handle for ease in opening.
- Roof reinforced underneath to provide adequate strength and durability.
- Standard large equipment compartment longitudinally between rear animal compartments
- 750 CFM Fresh-Air Blower System installed to distribute fresh oxygen-bearing air equally to all compartments, exchanging air approximately 5 times per minute.
- Housing for Fresh-Air Blower System on roof with air distribution tunnel providing equal distribution to all compartments.
- Standard full through compartment with center divider door.
- All LED body light, reflectors, rear stop, tail, turn signals, back-up, and license lights installed – as required by Federal Highway Safety regulations.
- LED auxiliary 4-way flashers, red lens, 4 1/8" diameter. Operates through rear stop and turn lamps. Affords added safety.
- Heavy steel rear bumper installed with aluminum tread plate STEP/CAP. Mud and splash guards installed at rear wheels.
- Mounted onto chassis frame using three mounting-points on each side of frame. Rubber mounting isolators used to reduce excess vibration and strain on body.
- Color is white.
- Constructed with extra strength to resist damage, but if repairs are needed it is a simple operation. Merely clean damaged area and fill with fiberglass-plastic body filler as used by all boat marinas and auto body repair shops.

**Designed with the Humane Treatment of Animals in Mind!**



# ARF-95 Optional Items



## Slide-Out Trays



Installed in curbed rear compartment. Holds 6 carriers or 4 traps.

## Compartment Flooring



Lightweight, easy to clean, fungus resistant. Provides a dry resting surface for animals.

## LED Warning Lights



Two (2) flush-mounted 3" x 7" LED Lights mounted on rear or side of body.

## LED Beacon Light



Mounted at top front body location.

## Pull-Out Fold-Down Ramp



Lightweight, non-slip aluminum tread ramp installed under right side front compartment.

## Catch Pole Holder



Installed in rear storage compartment.



**Member of the National Truck Equipment Association**





# ARF-95 Optional Items

## Compartment Lighting



Stainless framed recessed compartment lights installed in compartment ceilings. Switch for lights on cab panel.

## Roof Rack & Wear Strips



Heavy-Duty polished stainless steel tie-down rails on each side of roof. Aluminum wear strips on roof. Used for transport of traps, ladders, etc..

## Traffic Advisor



Directional traffic advisor, installed on rear of body.

## Mini LED Front Light Bar



Mounted on top front body or on cab roof.

## Rear LED Warning Lights



Two (2) flush-mounted 7" x 9" LED lights mounted on rear of body.

## LED Scene Lights



Flush-mounted side and/or rear scene lights, installed in body roof rail above animal compartments.




**Many additional options are available. Call Swab for details, including complete written specifications, drawings and prices.**







# ARF-95 Floor Plans

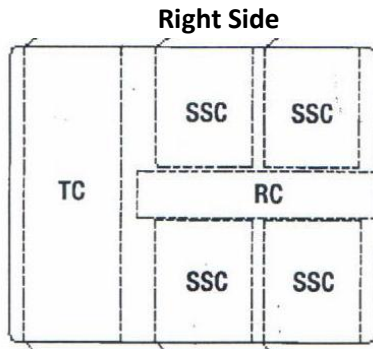


Left Side  
**STANDARD**

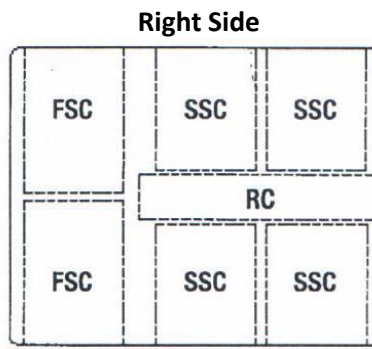


Left Side  
**OPTION A**

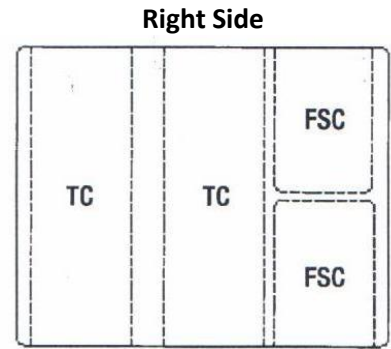


Left Side  
**OPTION B**

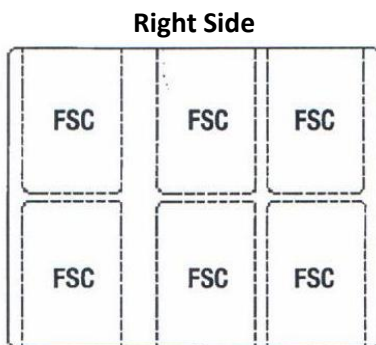

Left Side  
**OPTION C**

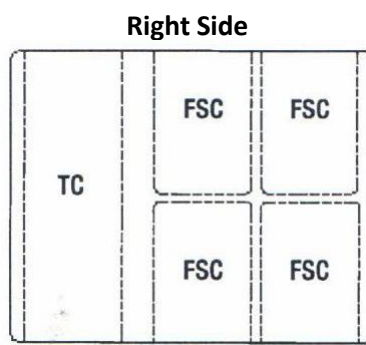

Left Side  
**OPTION D**

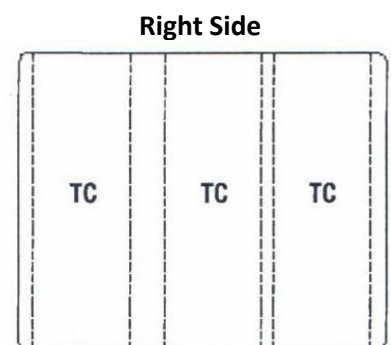

Left Side  
**OPTION E**

## COMPARTMENT DIMENSIONS

### Short Side Compartment (SSC)

25" wide x 30" high x 30" deep

### Full Side Compartment (FSC)

25" wide x 30" high x 36" deep

### Through Compartment (TC)

25" wide x 30" high x 75" deep

### Rear Compartment (RC)

12" wide x 30" high x 64" deep

## Detailed Specifications

Detailed Specifications can be furnished for use in preparing public bid papers. Detailed specifications remain the property of Swab Wagon Company, Inc. and shall not be transferred to other agencies, associations, or individuals.

## Warranty

Body and specified equipment is warranted free of defects for a period of two (2) years after delivery, Defective equipment will be replaced without charge during this period, with purchaser responsible for labor involved in replacement. Body manufacturer shall be fully responsible for defects in fiberglass-plastic material during this same period. Air conditioning, warning lights and all other electrical equipment to carry equipment manufacturer's warranty.

# Swab Wagon Company, Inc.

44 S Callowhill St, Elizabethville, PA 17023

Phone 800-834-7922 Fax 717-362-4579

[www.swabwagon.com](http://www.swabwagon.com)

